



ROBOTIC CLEANER CORD SEAL KIT

Installation Instructions

IMPORTANT SAFETY INSTRUCTIONS

Basic safety precautions should always be followed, including the following: Failure to follow instructions can cause severe injury and/or death.

- ▲ This is the safety-alert symbol. When you see this symbol on your equipment or in this manual, look for one of the following signal words and be alert to the potential for personal injury.
- ▲ **WARNING** warns about hazards that **could** cause serious personal injury, death or major property damage and if ignored presents a potential hazard.



- ▲ **WARNING - Read and follow all instructions** in this owner's manual and on the equipment. Failure to follow instructions can cause severe injury and/or death.



- ▲ **WARNING – Risk of Electric Shock.** All electrical wiring **MUST** be in conformance with applicable local codes, regulations, and the National Electric Code (NEC). Hazardous voltage can shock, burn, and cause death or serious property damage. To reduce the risk of electric shock, do NOT use an extension cord to connect unit to electric supply. Provide a properly located electrical receptacle. Before working on any electrical equipment, turn off power supply to the equipment. To reduce the risk of electric shock replace damaged wiring immediately. Locate conduit to prevent abuse from lawn mowers, hedge trimmers and other equipment. Do NOT ground to a gas supply line.

PARTS LIST:

RC59009GR	SEAL PLUG
RC59003	COMPRESSION SEAL-BLACK- Large Hole
RC97462	COMPRESSION SEAL-WHITE-Small Hole
RC12301	WASHER-CONNECTOR, PLASTICV
RC12302	WASHER-CONNECTOR, PLASTIC
RC59002GR	CONNECTOR 2 PIN
RC59008GR	CONNECTOR 4 PIN
RC12010	SET OF 4 SCREWS-PT,M5-2.24X12 -Short
RC97461	SET OF 4 SCREWS-PT,M5-2.24X35 -Long

Hayward Pool Products
620 Division Street, Elizabeth, NJ 07207
Phone: (908) 355-7995
www.hayward.com



HAYWARD®


INSTRUCTIONS:

The furnished seal system does not require the use of RTV sealant. It is a 4 piece system. This seal system can be used on all older motors when replacing a cord or motor box. It must be used on all cleaners built after January 2015. NOTE: The old cord sets will not work on the new motor boxes. NOTE: The White Compression seal is **ONLY** used on SharkVAC® cleaners with 50 ft cords.

Pictured below are the seal components:



Seal Plug

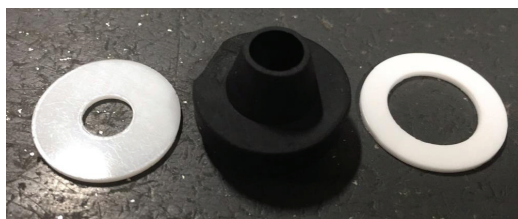

Washers and Compression Seal




Stacked Seal System

It is critical that the correct torque be applied to this seal system. The proper torque, 50 in*lbs, must be applied to assure a leak free installation. You must use the RCX79005 torque wrench, or equivalent. The RC59002GR Connector must be installed on units with two conductors, the RC59008GR on units with 4 conductors, for proper electrical connection



Stacked Seal system with cord and connector.

Mounting the Motor Box (TigerShark® ONLY) The motor box is mounted with four (4) self-tapping screws RC12010 (Small). The SharkVAC® motor box is mounted with the long RC97461 screws.

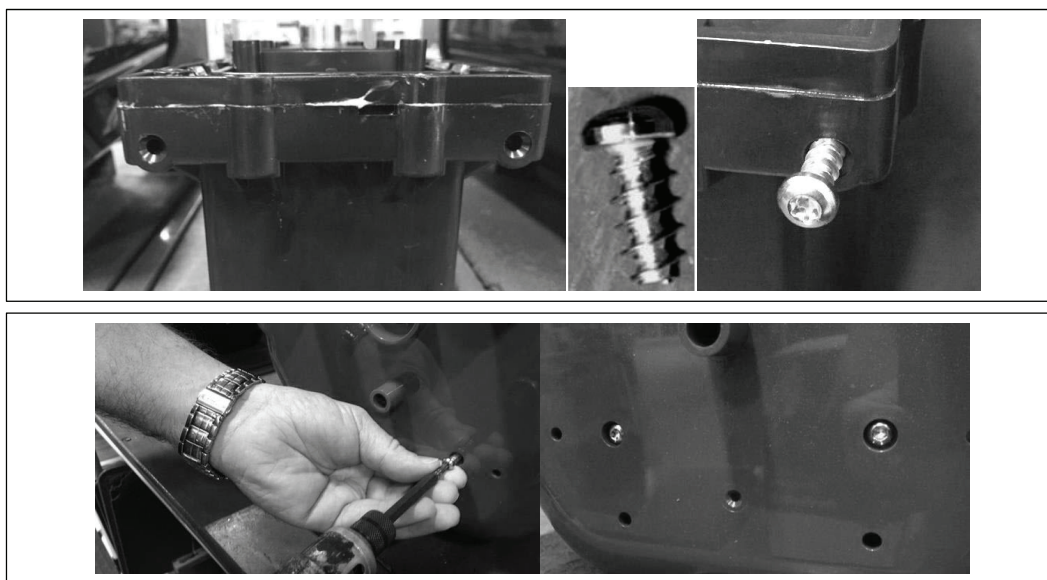

SAVE THESE INSTRUCTIONS



Hayward, TigerShark and SharkVAC are registered trademarks of Hayward Industries, Inc.
© 2017 Hayward Industries, Inc.