


Hayward Spa Side Remote

Operation

Buttons

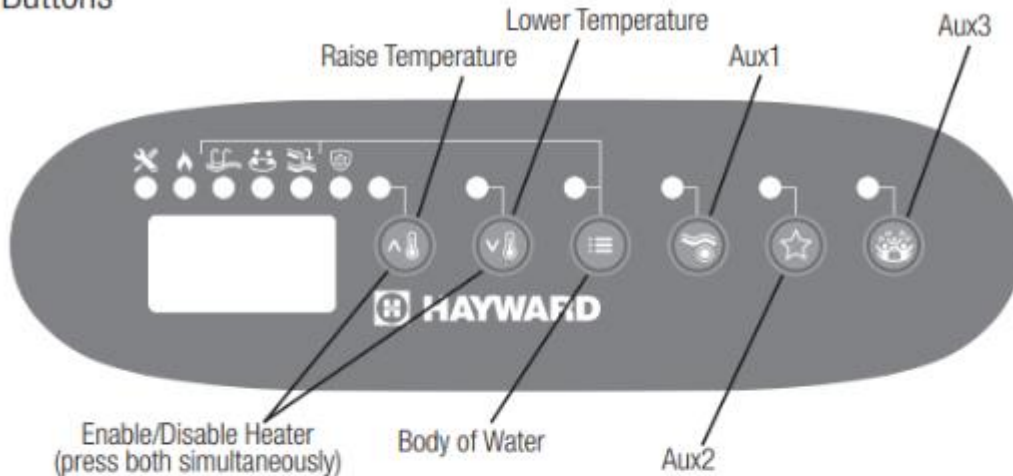

Raise/Lower Temperature

These two buttons are used to control the spa temperature. If the OmniLogic or OmniHub is currently controlling the pool, these buttons will not function. In Spa mode, a single push of either button will display the setpoint (blinking display). Subsequent pushes will raise or lower the setpoint (solid display).

Enable/Disable Heater

The heater can be enabled and disabled remotely from the HLSPASIDE by briefly pushing in the "Raise Temperature" and "Lower Temperature" button at the same time. When disabled, the display will show "OFF" and the heater will not respond to the Raise/Lower Temperature buttons.

Body of Water

This button will toggle the control between Pool, Spa and Spillover mode (if Spillover is enabled). If the OmniLogic/OmniHub is controlling the pool, pressing this button will override schedules/timers and switch the control into Spa mode. Press the button again to enter Spillover mode. Another press of the button will return to Pool mode where the pump will resume the schedule. If the pool pump was running manually or by countdown timer (not by schedule), the pump will turn off when going back into Pool mode.

The filter pump can be turned off by pressing this button for 3 seconds.

Aux1, Aux2 and Aux3 Control

Although these three buttons have different icons, their function is the same. They are used to provide On/Off control of Equipment, Favorites or Themes which are assigned in the Configuration Wizard. The corresponding indicators will light when the function is on.